

HOW TO DETERMINE RING SIZE

CONFIRM PRINTED PAPER SIZE

- ◆ **In print dialog box**, ensure the page prints at "Actual Size", confirming size scaling is set at "None".
- ◆ **Measure bar on right** to verify that the length matches exactly as shown, 2 in or 50 mm.
- ◆ **If measurement is not accurate**, ring sizing will not be completed correctly.




or



OPTION 1 CREATE YOUR OWN RING SIZER

1. Cut out template of ring sizer below. Snip along dotted line to create slot.
2. Slide the pointed end of ring sizer through the slot to make a loop. Make sure numbers are visible. Insert intended finger through loop and pull tightly for a snug fit.
3. The number that lines up with the slit is your ring size! If the sizer indicates that you are in between two sizes, opt for the larger size.

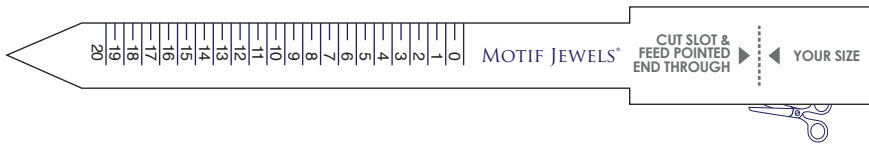

TIPS:



Finger size changes, so measure your finger when it is at its largest. This is usually at the end of the day.

Avoid measuring your fingers when they are cold or damp (fingers are smaller early in the morning, and when cold).

Measure finger size at least 3 times, to eliminate inaccurate readings.

OPTION 2 MEASURE A CURRENT RING

1. Choose a ring that properly fits the intended finger.
2. Place the ring over the circles on the guide below. Closely match the **inside edge** of the ring to the circle nearest in size.
3. If the ring falls between two of the sizes, opt for the larger size.

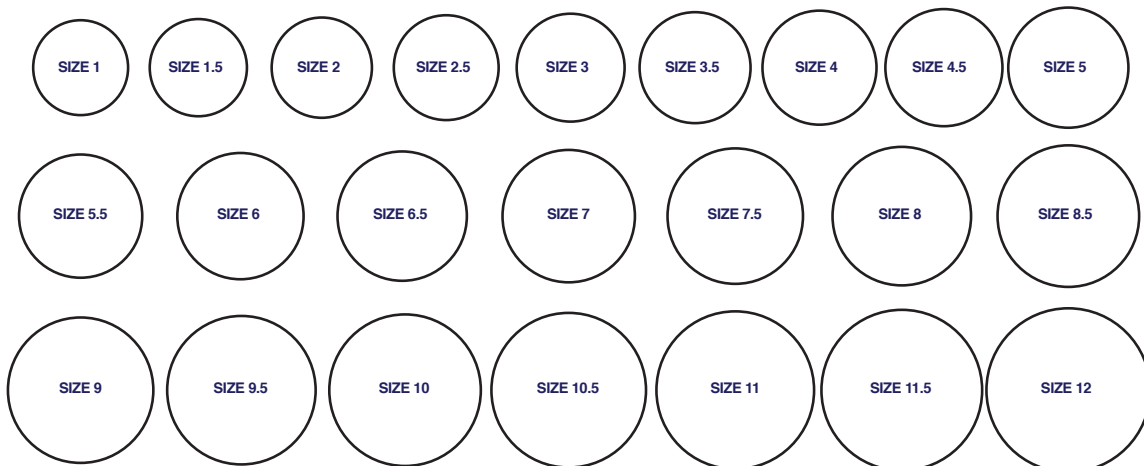

Inside	Inside	Inside	Inside	Number	Wheat			
Diameter	Diameter	Circum-	Circum-	US/Canada	British	Japan/China	Swiss	Euro
(inches)	(mm)	ference	ference	Standard	Irish	Equivalent	Equivalent	Equivalent
		(inches)	(mm)		Australian			
					Equivalent			
0.458	11.6	1.44	36.5	0				
0.466	11.8	1.46	37.2	1/4				
0.474	12.0	1.49	37.8	1/2	A			
0.482	12.2	1.51	38.4	3/4	A 1/2			
0.490	12.4	1.54	39.1	1	B	1		
0.498	12.6	1.56	39.7	1 1/4	B 1/2			
0.506	12.9	1.59	40.4	1 1/2	C			
0.514	13.1	1.61	41	1 3/4	C 1/2			
0.522	13.3	1.64	41.6	2	D	2	1.5	
0.53	13.5	1.66	42.3	2 1/4	D 1/2			
0.538	13.7	1.69	42.9	2 1/2	E	3	2.75	
0.546	13.9	1.71	43.5	2 3/4	E 1/2			
0.554	14.1	1.74	44.2	3	F	4	4	44
0.562	14.3	1.77	44.8	3 1/4	F 1/2	5	5.25	45
0.57	14.5	1.79	45.5	3 1/2	G			
0.578	14.7	1.82	46.1	3 3/4	G 1/2	6	6.5	
0.586	14.9	1.84	46.7	4	H	7		46
0.594	15.1	1.87	47.4	4 1/4	H 1/2		7.75	
0.602	15.3	1.89	48	4 1/2	I	8		47
0.61	15.5	1.92	48.7	4 3/4	J		9	48
0.618	15.7	1.94	49.3	5	J 1/2	9		49
0.626	15.9	1.97	49.9	5 1/4	K		10	50
0.634	16.1	1.99	50.6	5 1/2	K 1/2	10		
0.642	16.3	2.02	51.2	5 3/4	L		11.75	51
0.65	16.5	2.04	51.8	6	L 1/2	11	12.75	
0.658	16.7	2.07	52.5	6 1/4	M	12		52
0.666	16.9	2.09	53.1	6 1/2	M 1/2	13	14	
0.674	17.1	2.12	53.8	6 3/4	N			53
0.682	17.3	2.14	54.4	7	N 1/2	14	15.25	54
0.69	17.53	2.17	55.1	7 1/4	O			
0.698	17.73	2.19	55.7	7 1/2	O 1/2	15	16.5	
0.706	1.93	2.22	56.3	7 3/4	P			
0.714	18.14	2.24	57.0	8	P 1/2	16	17.75	
0.722	18.34	2.27	57.6	8 1/4	Q			

0.73	18.54	2.29	58.3	8 1/2	Q 1/2	17		
0.738	18.75	2.32	58.9	8 3/4	R		19	
0.746	18.95	2.34	59.5	9	R 1/2	18		
0.754	19.15	2.37	60.2	9 1/4	S		20.25	
0.762	19.35	2.39	60.8	9 1/2	S 1/2	19		
0.77	19.56	2.42	61.4	9 3/4	T		21.5	
0.778	19.76	2.44	62.1	10	T 1/2	20		
0.786	19.96	2.47	62.7	10 1/4	U	21		
0.794	20.17	2.49	63.4	10 1/2	U 1/2	22	22.75	
0.802	20.37	2.52	64.0	10 3/4	V			
0.81	20.57	2.54	64.6	11	V 1/2	23		
0.818	20.78	2.57	65.3	11 1/4	W		25	
0.826	20.98	2.59	65.9	11 1/2	W 1/2	24		
0.834	21.18	2.62	66.6	11 3/4	X			
0.842	21.39	2.65	67.2	12	X 1/2	25	27.5	
0.85	21.59	2.67	67.8	12 1/4	Y			
0.858	21.79	2.70	68.5	12 1/2	Z	26	28.75	
0.866	22.00	2.72	69.1	12 3/4	Z 1/2			
0.874	22.20	2.75	69.7	13		27		
0.882	22.40	2.77	70.4	13 1/4	Z1			
0.89	22.61	2.80	71.0	13 1/2				
0.898	22.81	2.82	71.7	13 3/4	Z2			
0.906	23.01	2.85	72.3	14	Z3			
0.914	23.22	2.87	72.9	14 1/4				
0.922	23.42	2.90	73.6	14 1/2	Z4			
0.93	23.62	2.92	74.2	14 3/4				
0.938	23.83	2.95	74.8	15				
0.946	24.03	2.97	75.5	15 1/4				
0.954	24.23	3.00	76.1	15 1/2				
0.962	24.43	3.02	76.8	15 3/4				
0.97	24.64	3.05	77.4	16				